

06 Downlights Fixed LED > UGR19 Adjustable CCT Range

10130UV/W



30W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 700mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

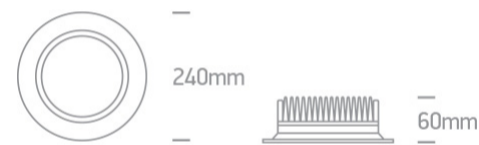

Gallery

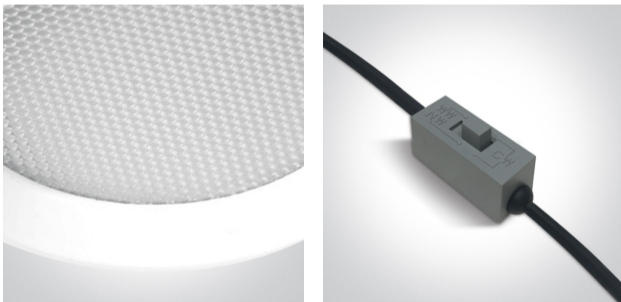




Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Adjustable CCT Range
Order Code	10130UV/W
Colour	White
Material	Die Cast
Shape	Circular
Height	60mm


Diameter	240mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	40V
Safety Class	
Power(Watts)	28W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar



Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
17,5-29,4W
0,9
Yes
25-42V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
2250lm
75lm/W
80

19

Packing Info

Pcs/Carton

20


Barcode

5291889065326

HS Code

9405409900

Energy Label

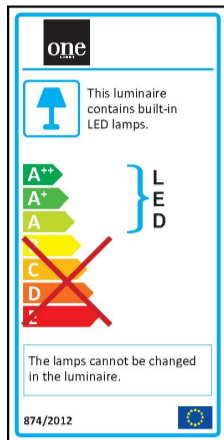

Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to
one light!

one
LIGHT

