

04 Recessed Spots Adjustable LED > Recessed COB Cylinders

11107C/B/W



7W COB LED recessed adjustable spot, for general lighting applications.

Requires 700mA constant current LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery



Must be ordered separately



89015A



89015AT


Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	Recessed COB Cylinders
Order Code	11107C/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	90mm
Diameter	91mm
Cutout Hole Diameter	83mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	10V
Safety Class	III
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in

LED Type
LED Brand
LED Number
Cable Length
F Mark

COB
Bridgelux
1
40cm


Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

3000K
520lm
74,3lm/W
90
36°


Yes

Packing Info

Box Length
Box Width
Box Height
Pcs/Carton
Barcode
HS Code

10cm
10cm
10cm
36
5291889058397
9405409900

Energy Label

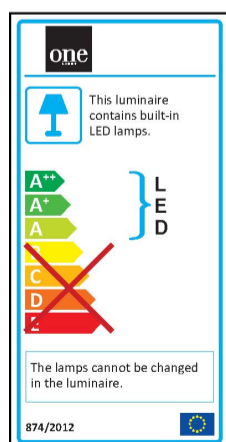

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

