



Product Datasheet

04 Recessed Spots Adjustable LED>The IP44 & IP54 COB

11107WD/W/W

Outdoor/Bathroom Range Aluminium



7W LED Dark Light Recessed adjustable spot, IP54.

Requires 700mA driver.

Complies with standard EN60598-1 and any other specific standards.



















Downloads










Dimensions

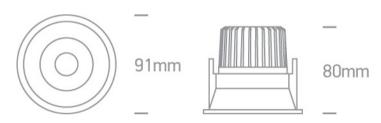

Gallery



Must be ordered separately



89015A

Related items



89015AT

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The IP44 & IP54 COB Outdoor/Bathroom Range Aluminium
Order Code	11107WD/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	80mm
Diameter	91mm
Cutout Hole Diameter	83mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes
Outdoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	ŢIII
Power(Watts)	7W
IP Rating	IP54
Light Source	LED built in

LED Type	СОВ
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	F

Illumination Data		
Colour Temperature	3000K	
Lumen Output	350lm	
Light Efficiency	50lm/W	
CRI	90	
Beam Angle	36°	
Illumination Diagram		
Dark Light	Yes	

Packing Info	
Box Length	10,5cm
Box Width	9,5cm
Box Height	9,5cm
Box Weight	0,310Kg
Pcs/Carton	36
Barcode	5291889050698
HS Code	9405409900

Certification & Warranty

Weee Directive

Warranty 3 Years

Yes

switch to one light!

