

08 Downlights Adjustable LED>The COB Round Downlights Die cast

11150B/W/W



50W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

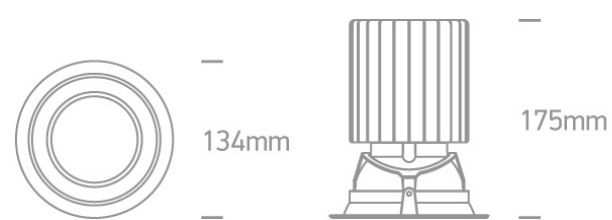

Gallery






Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Round Downlights Die cast
Order Code	11150B/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	175mm

Diameter	134mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	250mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Safety Class	
Power(Watts)	45,6W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

30-50,4W

Power Factor

0,9

Constant Current

Yes

1200mA

25-42V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

75°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Short circuit protection

Illumination Data

Colour Temperature

3000K

Lumen Output

3750lm

Light Efficiency

75lm/W

CRI

80

Beam Angle

40°

Illumination Diagram



Packing Info

Box Weight

1,25kg

Pcs/Carton

12


Barcode

5291889046714

HS Code

9405409900

Energy Label

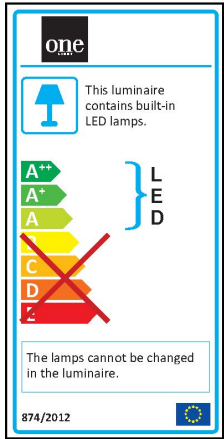

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

