



04 Recessed Spots Adjustable LED>Recessed COB Cylinders

11207C/B/W



2x7W COB LED recessed adjustable spot, for general lighting applications.

Requires 700mA constant current LED drivers.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

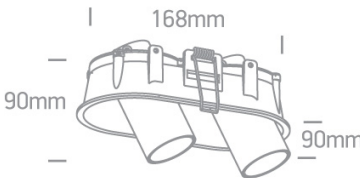

Must be ordered separately



89015A

Related items



89015AT

Physical Specification

Item Group

04 Recessed Spots Adjustable LED



Family
Order Code
Colour
Material
Shape
Length
Width
Height
Cutout Hole Diameter
Recessed Ceiling
Depth Required
Indoor
Adjustable

Recessed COB Cylinders
11207C/B/W
Black
Die Cast
Rectangular
168mm
90mm
90mm
2x83mm
Yes
90mm
Yes
2 Directions


Electrical Characteristics

Fitting

Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand
LED Number
Cable Length
F Mark

Constant Current
700mA
10V

2x7W
IP20
LED built in
COB
Bridgelux
1
40cm


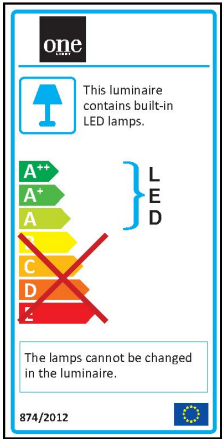
Illumination Data

Colour Temperature	3000K
Lumen Output	2x520lm
Light Efficiency	74,3lm/W
CRI	90
Beam Angle	36°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	17,5cm
Box Width	9,5cm
Box Height	10cm
Pcs/Carton	24
Barcode	5291889058403
HS Code	9405409900

Energy Label



Warranty

3 Years

Weee Directive

Yes

switch to
one light!

