


Product Datasheet

www.1-light.eu

New 2021 Edition 3>Wall & Ceiling LED

12108D/BBS/W

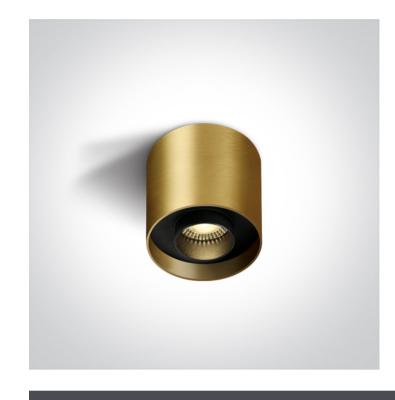

8W COB LED Cylinder CRI 97 with exchangeable reflectors.

Reflector must be order separately.
Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Must be ordered separately







050206/BS



050206/W


Physical Specification

Item Group	New 2021 Edition 3
Family	Wall & Ceiling LED
Order Code	12108D/BBS/W
Colour	Brushed Brass
Material	Aluminium
Shape	Circular

Height	70mm
Diameter	70mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
ectrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	9,18V
Power(Watts)	6,42W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,9-6,72W
Power Factor	0,9
Constant Current	Yes
700mA	2,7-9,6V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	KEGU
Illumination Data	
Colour Temperature	3000K
Colour Temperature Lumen Output	3000K 560lm
Lumen Output	560lm
Lumen Output Light Efficiency	560lm 70lm/VV
Lumen Output Light Efficiency CRI	560lm 70lm/VV 97
Lumen Output Light Efficiency CRI Beam Angle	560lm 70lm/VV 97
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	560lm 70lm/W 97 24°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	560lm 70lm/W 97 24°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	560lm 70lm/W 97 24°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	560lm 70lm/W 97 24°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	560lm 70lm/W 97 24° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	560lm 70lm/W 97 24° Yes 8cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width	560lm 70lm/W 97 24° Yes 8cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height	560lm 70lm/W 97 24° Yes 8cm 8,5cm
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height Pcs/Carton	560lm 70lm/W 97 24° Yes 8cm 8cm 8,5cm

Energy Label



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to one light!

