




Product Datasheet

14 Wall & Ceiling LED>Adjustable COB Cylinders

12108X/W/W

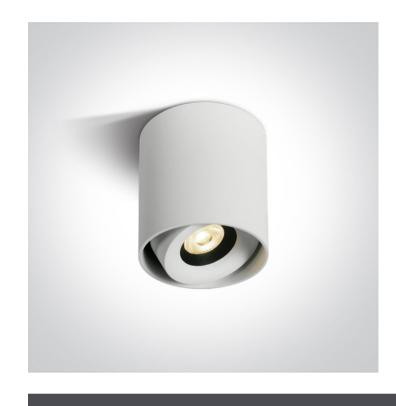

Surface dimmable cylinder with COB LED.

Complete with 350mA constant current dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Adjustable COB Cylinders
Order Code	12108X/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	100mm
Diameter	80mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

one	

Input Voltage

50 Hz

60 Hz

Led Driver

220-240V

Yes

Yes

Power(Watts)	4,2-8,4W
Power Factor	0,9
Constant Current	Yes
350mA	12-24V
IP Rating	IP20
Safety Class	
Housing Material	Plastic
Brand	AlDimming
llumination Data	
llumination Data	
Ilumination Data Colour Temperature	3000K
	3000K 640lm
Colour Temperature	
Colour Temperature Lumen Output	640lm
Colour Temperature Lumen Output Light Efficiency	640lm 80lm/W
Colour Temperature Lumen Output Light Efficiency CRI	640lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	640lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	640lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	640lm 80lm/W 90


5291889064701

9405409900

Energy Label

Barcode

HS Code



Certification & Warranty

Warranty	3 Years
Weee Directive	Yes



