


12 Wall & Ceiling LED>The UGR19 Cylinders CCT V

12112D/W/V

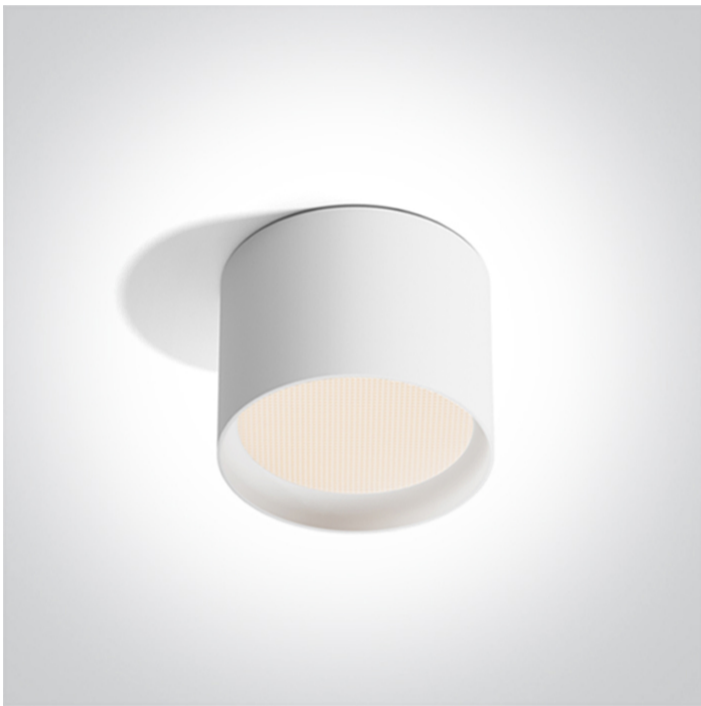

CCT Variable 12W LED surface mounted downlight. IP44.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions



## Gallery






## Physical Specification

Item Group	12 Wall & Ceiling LED
Family	The UGR19 Cylinders CCT V
Order Code	12112D/W/V
Colour	White
Material	Aluminium
Shape	Circular
Height	75mm

Diameter	100mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

### Electrical Characteristics


Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
IP Rating	IP44
Light Source	LED built in
LED Type	SMD
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Output	300mA
IP Rating	IP20
Dimmable	No

#### Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	1200lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	90°
Illumination Diagram	
UGR	19

#### Packing Info

Box Weight	0.397kg
Pcs/Carton	30
Barcode	5291889082729
HS Code	9405413990

#### Certification & Warranty

Warranty	5 years
----------	---------

switch to  
**one light!**

**one**  
LIGHT

