




Product Datasheet

New 2023 Edition 2>Wall & Ceiling LED

12115G/B/W

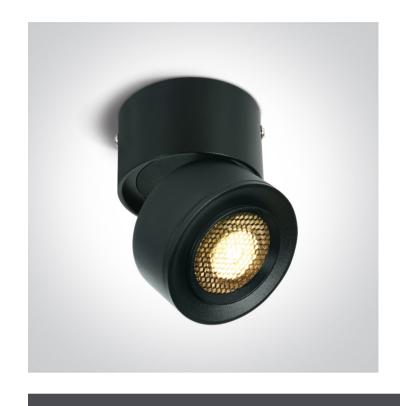

15W COB LED zoomable 15°-45° adjustable ceiling light with removable honeycomb.

Supplied with 350mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions



Physical Specification

Item Group	New 2023 Edition 2
Family	Wall & Ceiling LED
Order Code	12115G/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	95mm
Diameter	80mm
Recessed Ceiling	Yes
Indoor	Yes
Adjustable	2 Directions

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	41V
Safety Class	
Power(Watts)	14,35W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Bridgelux
LED Number	1
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	10,5-14,7W
Power Factor	0,9
Constant Current	Yes
350mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KGP
Protection	Short Circuit Protection, Overload Protection, No-load Protection
Ilumination Data Colour Temperature	3000K
	3000K 1500lm
Colour Temperature	
Colour Temperature Lumen Output	1500lm
Colour Temperature Lumen Output Light Efficiency	1500lm 100lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1500lm 100lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1500lm 100lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1500lm 100lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1500lm 100lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1500lm 100lm/W 90 15°-45°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton	1500lm 100lm/W 90 15°-45° 100lm/W

Certification & Warranty

switch to one light!

