Product Datasheet

www.1-light.eu

14 Wall & Ceiling LED>The SMD Cylinders Aluminium

12115LD/W/W

15W SMD LED ceiling downlight, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI DARK LIGHT CE

Downloads

IES

CE

Dimensions

150mm

125mm

Physical Specification

Item Group	14 Wall & Ceiling LED
Family	The SMD Cylinders Aluminium
Order Code	12115LD/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	125mm
Diameter	150mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

one
LIGHT

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	⏚
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	42V
Power(Watts)	14,7W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Samsung

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,5-14,7W
Power Factor	0,9

one

Constant Current	Yes
350mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic

Illumination Data

Colour Temperature	3000K
Lumen Output	1280lm
Light Efficiency	85,33lm/W
CRI	80
Beam Angle	90°
Illumination Diagram	
Dark Light	Yes

Packing Info

Pcs/Carton	18
Barcode	5291889060994
HS Code	9405409900

Energy Label
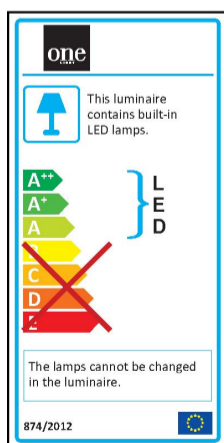
Warranty	2 Years
Weee Directive	Yes

switch to one light!

one
LIGHT