

12 Office & Kitchen > UGR19 Recessed LED Linear Profiles

## 38150AR/W/W



40W UGR19 Recessed linear with diffuser, ideal for offices.

Complete with 1000mA driver , 4pcs fixing clips, 4pcs connectors & 2pcs end cups.

Can be connected in line


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

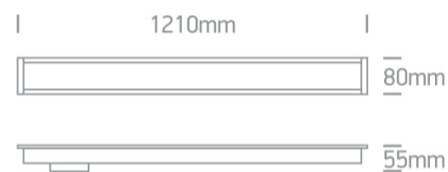

### Gallery





### Physical Specification


Item Group	12 Office & Kitchen
Family	UGR19 Recessed LED Linear Profiles
Order Code	38150AR/W/W
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular

Length	1210mm
Width	80mm
Height	55mm
Cutout Hole Width	1200mm
Cutout Hole Length	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No


### Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	36V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
<b>Gear</b>	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30-42W
Power Factor	0,95
Constant Current	Yes
1000mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Metal
Output Terminal	Connector
Brand	ATG

### Illumination Data

Colour Temperature	3000K
Lumen Output	3600lm
Light Efficiency	90lm/W
CRI	90
Illumination Diagram	
UGR	19

### Packing Info

Pcs/Carton	12
Barcode	5291889063872

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

