


Product Datasheet

www.1-light.eu

20 Garden & Underwater>LED Garden Spots

67482/AN/W

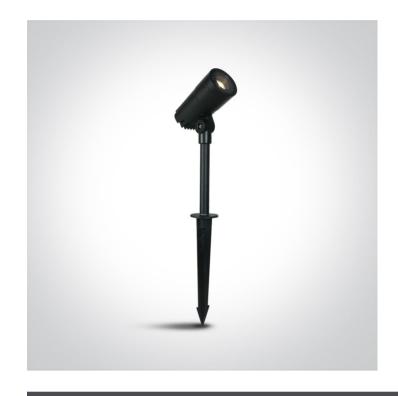

11W Zoomable 20-60deg Garden Light with spike, IP65.

Complete with 250mA driver

Complies with standard EN60598-1 and any other specific standards.



Downloads







Dimensions



Gallery



Physical Specification

Item Group	20 Garden & Underwater
Family	LED Garden Spots
Order Code	67482/AN/W
Colour	Anthracite
Material	Die Cast
Shape	Circular
Height	130mm
Shape	Circular


Diameter	70mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	2 Directions
IK Rating	6
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	100-240V

50 Hz Yes 60 Hz Yes Safety Class Power(Watts) 11W IP Rating IP65

Light Source	LED built in
Dimmable	No
Cable Length	150cm
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	250mA
Voltage	40V
Power(Watts)	10W
IP Rating	IP65
Light Source	LED built in
LED Type	СОВ
LED Brand	Edison

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-11,25W
Power Factor	0,9
Constant Current	Yes
250mA	30-45V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Eaglerise
Illumination Data	
Colour Tomporoture	2000K
Colour Temperature	3000K
Lumen Output	500lm
Lumen Output Light Efficiency	500lm 45,45lm/W
Lumen Output Light Efficiency CRI	500lm 45,45lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	500lm 45,45lm/W
Lumen Output Light Efficiency CRI	500lm 45,45lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	500lm 45,45lm/W 80
Lumen Output Light Efficiency CRI Beam Angle	500lm 45,45lm/W 80
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	500lm 45,45lm/W 80
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	500lm 45,45lm/W 80 20°-60°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton	500lm 45,45lm/VV 80 20°-60°

Energy Label



Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



