Product Datasheet

www.1-light.eu

07 Strips & Profiles>The Flexible Lens Strip Asymmetric

7890/C

IP65 Flexible LED light strip, 18W/m. Supplied in 5 meters roll.

Includes 2 extra sets of end caps.

Requires 24V DC constant voltage LED driver. Avoid direct sunlight.

Complies with standard EN60598-1 and any other specific standards.

IP65 85 CRI DIMMABLE

Downloads

IES

Dimensions

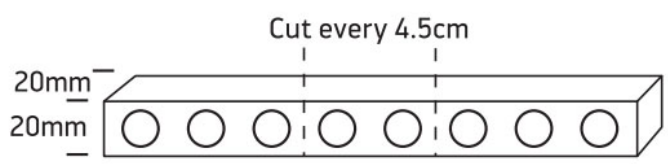

Related items

7890E



7890F



7890FL

Physical Specification

Item Group	07 Strips & Profiles
Family	The Flexible Lens Strip Asymmetric
Order Code	7890/C
Material	Silicone
Shape	Rectangular
Length	5000mm
Width	20mm

Height	20mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	III
IP Rating	IP65
Light Source	LED built in
LED Type	SMD
F Mark	F

Illumination Data

Colour Temperature	4000K
Lumen Output	1620lm/m
Light Efficiency	90lm/W
CRI	85
Beam Angle	15° x 45°
Illumination Diagram	

Packing Info

Box Weight	2.050kg
Pcs/Carton	4
Barcode	5291889083658

HS Code	9405423100

Certification & Warranty

Warranty	2 years

switch to
one light!

one
LIGHT