

#### PRODUCT DESCRIPTION

- Minimum height
- Smooth profile walls
- Small bending radius

F	ΙN	ш	$\subseteq$	Н	١.	
1	11.	M I	$\mathcal{L}$		١,	

Silver anodized

\*Custom colors available upon request

Fill empty fields



Product nr.

Fixture type

Company

Job name

Date

### **TECHNICAL SPECIFICATION**

### **Application**

- furniture and decorative lighting.

# Mounting

- to the surface, using a dedicated mounting track, mounting adhesive, properly selected screws or double-sided adhesive tape.

# Additional information

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof
- the profile fits dedicated mounting strips
- space for LED strip: 12.2 mm

Profile bending with covers: HS-12, K-12

Minimum internal radius	Minimum external radius
200 mm	250 mm


- minimum radius bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile
- internal radius refers to the profile bent so that the cover is facing the inside of the arch
- external radius refers to the profile bent so that the cover is facing the outside of the arch
- irregular curves are possible after consultation and individual quotation
- when bending anodized profiles, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius)



# **AVAILABLE LENGTHS**

Ref. nr.	surface finish	available lengths
B4369ANODA_1	Silver anodized	1000 mm
B4369ANODA_2	Silver anodized	2000 mm
B4369ANODA_3	Silver anodized	3000 mm

# **TECHNICAL DRAWING**





# **RELATED PROFILES**





TEST-36 Profile Ref: B6639

TEST-74 Profile Ref: W4507



# **RELATED PRODUCTS**

# **COVERS**

# **CLEAR COVERS**







KA-12 clear Cover Ref: 17079

KA-PRO-12 clear Cover Ref: 17067 100°

#### FROSTED COVERS



HS-12 frosted Cover Ref: 00157 110°



KA-12 frosted Cover Ref: 17078



KA-PRO-12 frosted Cover Covei Ref: 17066 **110°** 





### **END CAPS**

# **REGULAR END CAPS**



STOS-ALU metalized End cap Ref: 24065



STOS-ALU grey End cap Ref: 00085



### **ACCESSORIES**

#### **FASTENERS & MOUNTING ACCESSORIES**





PDS Spring Ref: 00800

TEKNIK Latch Ref: 24003


### **SEALING COMPONENTS**



6 x 1.2 Gland Ref: 00802

### **LED TAPES**

# WHITE

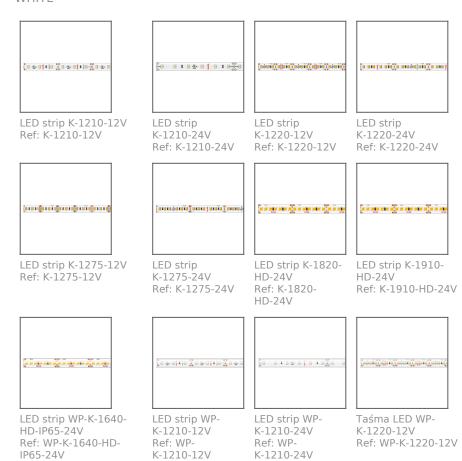





LED strip LED WP-K-1220-24V Ref: WP-K-1220-24V



LED strip WP-K-1275-12V Ref: WP-K-1275-12V



LED strip WP-K-1275-24V Ref: WP-K-1275-24V



LED strip WP-K-1220-IP65-12V Ref: WP-K-1220-IP65-12V



LED strip WP-K-1220-IP65-24V Ref: WP-K-1220-IP65-24V

#### HIGH EFFICACY



LED strip K-HE-0480-HD-24V Ref: K-HE-0480-HD-24V



LED strip K-HE-0960-HD-24V Ref: K-HE-0960-HD-24V



LED strip K-HE-1440-HD-24V Ref: K-HE-1440-HD-24V



LED strip K-HE-1920-HD-24V Ref: K-HE-1920-HD-24V

# LONG RUN



LED strip K-LR-1000-24V Ref: K-LR-1000-24V

# CRI 95+



LED strip WP-K-CR-1210-24V Ref: WP-K-CR-1210-24V



LED strip WP-K-CR-1220-24V Ref: WP-K-CR-1220-24V



LED strip WP-K-CR-1275-24V Ref: WP-K-CR-1275-24V



LED strip K-CR-1210-24V Ref: K-CR-1210-24V





LED strip K-CR-1220-24V Ref: K-CR-1220-24V



LED strip K-CR-1275-24V Ref: K-CR-1275-24V




LED strip K-CR-1820-HD-24V Ref: K-CR-1820-HD-24V




LED strip K-CR-1910-HD-24V Ref: K-CR-1910-HD-24V

### RGB / RGB-W



LED strip K-1275-RGB-12V Ref: K-1275-RGB-12V



LED strip K-1275-RGB-24V Ref: K-1275-RGB-24V



LED strip K-1530-RGB+W-24V Ref: K-1530-RGB+W-24V



LED strip K-1920-120-RGB-24V 19.2W/m Ref: K-1920-120-RGB-24V



LED strip WP-K-1920-120-RGB-24V Ref: WP-K-1920-120-RGB-24V

### TUNABLE WHITE / DIM TO WARM



LED strip K-27/65-1920-24V Ref:



LED strip WP-K-27/65-1920-24V Ref: WP-K-27/65-1920-24V K-27/65-1920-24V



LED strip K-22/50-1728-24V Ref: K-22/50-1728-24V



LED strip K-30/18-1770-24V Ref: K-30/18-1770-24V

# MARKETING MATERIALS



Display P230-90082M Ref: 90082M



Presentation set 1 Ref: 90051