


PRODUCT DESCRIPTION

- Mounting track
- Mounting to 16 mm / 0.63" drywall boards
- Easy servicing of the lighting fixture
- Stable mounting to a suspended ceiling
- Non visible aluminum elements

FINISH :

Non anodized (raw) 

*Custom colors available upon request

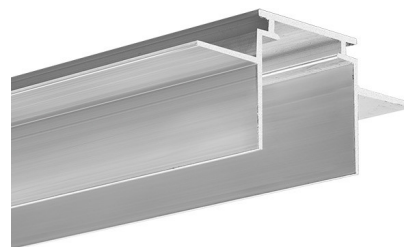

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- for creating easily serviceable built-in lighting fixtures
- for 16 mm (5/8") thick drywall


Mounting

- with screws appropriately selected for the mounting surface


AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B6638V1NA_1	Non anodized (raw)	1000 mm
B6638V1NA_2	Non anodized (raw)	2000 mm
B6638V1NA_3	Non anodized (raw)	3000 mm


TECHNICAL DRAWING

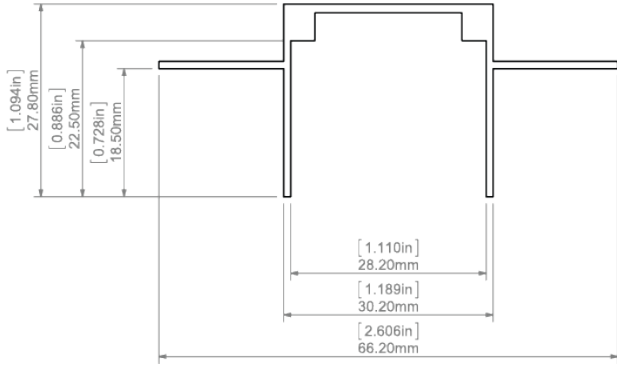


RELATED PROFILES




GIZA-LL profile
Ref: C0758



GIZA Profile
Ref: B5556



LIPOD Profile
Ref: B5554



LOKOM Profile
Ref: B5553