


w103 Sempé b traffic white

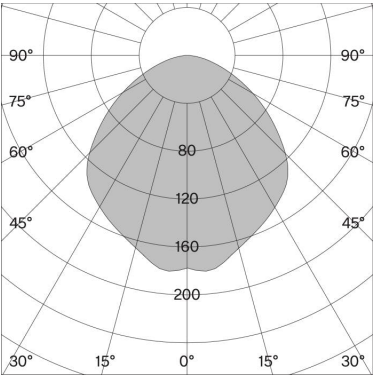

Technical information

Physical	
Material	Shade & LED engine: aluminium Arm: aluminium & steel Base & clamp: iron
Optics	Diffuser: polycarbonate
IP rating	20
Protection class	III
LED	
Light source	Integrated LED
Lifetime expectancy	L80 / 50,000 h
Colour rendering index (CRI)	97
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information


Version	
Mounting	
LED Colour temperature (CCT) / Luminous flux	
Efficacy	
Voltage / System power	
Light control	
Net weight	
Packaging dimensions	
Gross weight	
Colour	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Grey brown (NCS S-5010 Y90R)	

w103 Sempé b



b	
Base	
2700 K / 414 lm	
49 lm / W	
100–240 V / 8.4 W	
Dimmable	
4.3 kg	
L56.5 × W37 × H37 cm (0.08 m³)	
5.5 kg	
Art. No. / EAN code	
103B19016 / 7330492005850	
103B19005 / 7330492005836	
103B15010 / 7330492000008	

w103 Sempé c



Article-specific information

Version	c
Mounting	Clamp
LED Colour temperature (CCT) / Luminous flux	2700 K / 414 lm
Efficacy	49 lm / W
Voltage / System power	100–240 V / 8.4 W
Light control	Dimmable
Net weight	1.2kg
Packaging dimensions	L56.5 × W37 × H37 cm (0.08 m³)
Gross weight	2.0 kg

Colour	Art. No. / EAN code
Traffic white (RAL 9016)	103C19016 / 7330492005898
Jet black (RAL 9005)	103C19005 / 7330492005874
Grey brown (NCS S-5010 Y90R)	103B15010 / 7330492000008