


w103 Sempé s1 traffic white

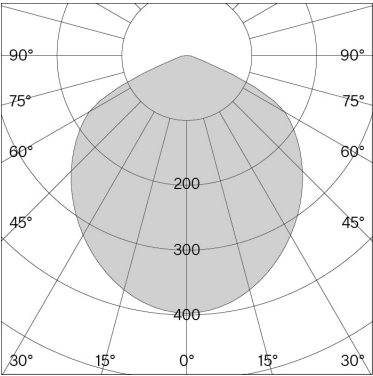

Technical information

Physical	
Material	Shade, LED engine & rail: aluminium Canopy: polycarbonate
Optics	Diffuser: polycarbonate
IP rating	20
Protection class	I
LED	
Light source	Integrated LED
Lifetime expectancy	L80 / 50,000 h
Colour rendering index (CRI)	97
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version
Mounting
Colour temperature (CCT) / Luminous flux
Efficacy
Voltage / System power
Light control
Net weight
Packaging dimensions
Gross weight

Colour	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Poppy red (NCS S-0580 Y80R)	
Light yellow (NCS S-1020 G80Y)	
Grey brown (NCS S-5010 Y90R)	
Slate blue (similar to RAL 5024)	

Accessories	
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	

w103 Sempé s1




s1
Ceiling suspended – Canopy included
2700 K / 414 lm
49 lm / W
220–240 V / 8.4 W
Phase-cut dim
0.9 kg
L36 × W36 × H21 cm (0.03 m³)
2.2kg

Art. No. / EAN code	
103S19016 / 7330492005911	
103S19005 / 7330492005973	
103S10580 / 7330492000022	
103S11020 / 7330492000039	
103S15010 / 7330492000046	
103S17697 / 7330492000053	

Art. No. / EAN code	
ACC00102 / 7330492001920	
ACC00105 / 7330492001937	
ACC00202 / 7330492001944	
ACC00205 / 7330492001951	

w103 Sempé s3



Article-specific information

Version
Mounting
Colour temperature (CCT) / Luminous flux
Efficacy
Voltage / System power
Light control
Net weight
Packaging dimensions
Gross weight

s3
Ceiling suspended – Canopy and steel wire attachment included
2700 K / 1242 lm
49 lm / W
220–240 V / 25 W
Phase-cut dim
2.7 kg
L127 × W37 × H24 cm (0.11 m³)
4.2kg

Colour	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Poppy red (NCS S-0580 Y80R)	
Light yellow (NCS S-1020 G80Y)	
Grey brown (NCS S-5010 Y90R)	
Slate blue (similar to RAL 5024)	

Art. No. / EAN code
103S39016 / 7330492006017
103S39005 / 7330492006024
103S35010 / 7330492000060

Accessories	
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	

Art. No. / EAN code