


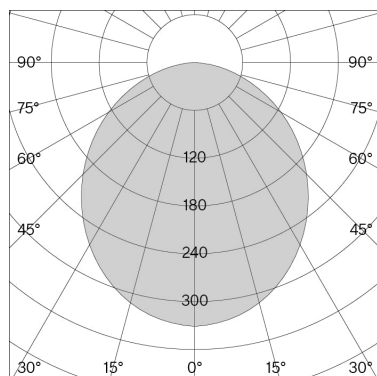

Technical information

Physical

Material	Shade: aluminium Base & pole: steel LED engine: aluminium & PMMA Canopy: polycarbonate
-----------------	--

Optics

Optics	Opal diffuser
--------	---------------

IP rating

IP rating	20
-----------	----

Protection class

Protection class	I
------------------	---

LED

Light source	Integrated LED
Lifetime expectancy	L80 / 50.000 h
CRI Colour rendering index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w132 Nendo

Article-specific information

Version

Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

Colour


Traffic white (RAL 9016)

Jet black (RAL 9005)

Accessories

1-phase track adapter with steel wire suspension white	☐
1-phase track adapter with steel wire suspension black	☒
3-phase track adapter with steel wire suspension white	☐
3-phase track adapter with steel wire suspension black	☒

w132 Nendo s



—
S

Ceiling suspended

2700 K / 850 lm

100–240 V / 15 W

57 lm / W

Phase-cut dim

1.9 kg

L68.6 × W37.7 × H32.5 cm (0.09 m³)

5.6 kg

Art. No. / EAN code

132S102 / 7330492006604

132S105 / 7330492006628

Art. No. / EAN code


132SACC00202 / 7330492002484

132SACC00205 / 7330492002491


132SACC00102 / 7330492001968

132SACC00105 / 7330492001975

w132 Nendo t

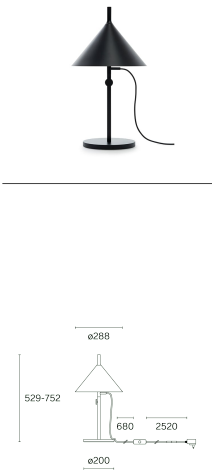

w132 Nendo f

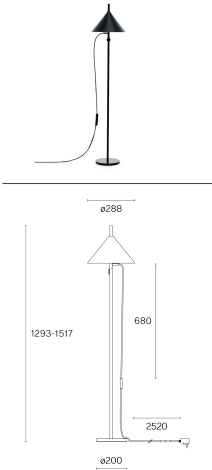

Article-specific information

Version	t
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	2700 K / 850 lm
Voltage / System power	100–240 V / 15 W
Efficacy	57 lm / W
Light control	Dimmer switch on cord
Net weight	6.3 kg
Packaging dimensions	L68.6 × W37.7 × H33.7 cm (0.09 m³)
Gross weight	10.1 kg

f
Floor base
2700 K / 850 lm
100–240 V / 15 W
57 lm / W
Dimmer switch on cord
7.0 kg
Box 1: L68.6 × W37.7 × H33.7 cm (0.09 m³)
Box 2: L123.2 × W9.4 × H5.6 cm (0.006 m³)

Art. No. / EAN code
132T102 / 7330492006697
132T105 / 7330492006710

Colour	
Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●

Art. No. / EAN code
132F102 / 7330492006512
132F105 / 7330492006536

Art. No. / EAN code
132F102 / 7330492006512
132F105 / 7330492006536

Accessories	
1-phase track adapter with steel wire suspension white	●
1-phase track adapter with steel wire suspension black	●
3-phase track adapter with steel wire suspension white	●
3-phase track adapter with steel wire suspension black	●

Art. No. / EAN code

Art. No. / EAN code