


w151 Extra large pendant s1 3000 K / traffic white

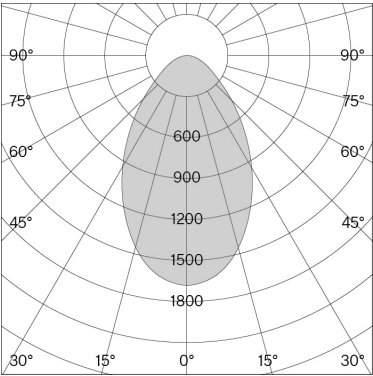

Technical information


Physical	
Material	Shade: aluminium Canopy: polycarbonate
Optics	Diffuser: acrylic
IP rating	20
Protection class	I

LED	
Light source	Integrated LED
Life time expectancy	L80 / 50,000 h
CRI Colour Rendering Index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w151 Extra large pendant

w151 Extra large pendant s2 3000 K / traffic white

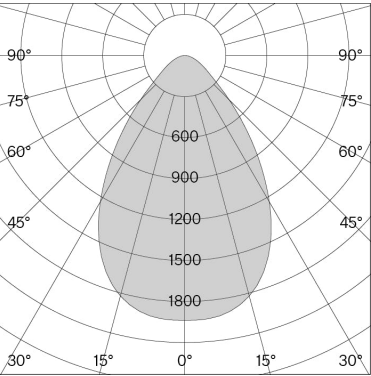


Article-specific information

Version	
Mounting	
LED Colour temperature (CCT) / Luminous flux	
Voltage / System power	
Efficacy	
Light control	
Net weight	
Packaging dimensions	
Gross weight	

2700 K Colour temperature (CCT)	
Traffic White (RAL 9016)	
Jet black (RAL 9005)	
Red orange (RAL 2001)	
Carmine red (RAL 3002)	
Purple red (RAL 3004)	
Raw brushed	

3000 K Colour temperature (CCT)	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Red orange (RAL 2001)	
Carmine red (RAL 3002)	
Purple red (RAL 3004)	
Raw brushed	

w151 Extra large pendant s1




s1
Ceiling suspended
2700 K / 3910 lm 3000 K / 4096 lm
220–240 V / 46 W
88 lm / W
DALI dim-Push dim
5.5 kg
L55 × W55 × H134 cm (0.4 m³)
10 kg


Art. No. / EAN code	
151S1279016	/ 7330492008950
151S1279005	/ 7330492008943
151S1272001	/ 7330492008967
151S1270002	/ 7330492000787

Art. No. / EAN code	
151S1309016	/ 7330492008981
151S1309005	/ 7330492008974
151S1302001	/ 7330492008998
151S1300002	/ 7330492000794

w151 Extra large pendant s2

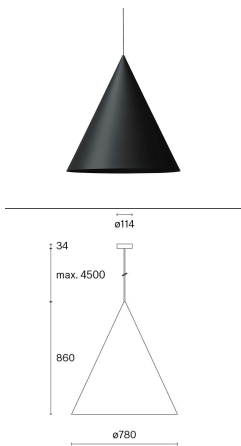

w151 Extra large pendant s3

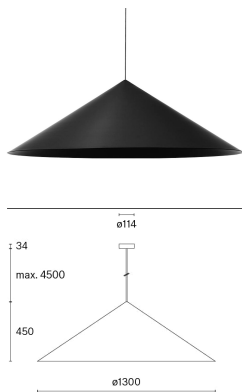

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

s2
Ceiling suspended
2700 K / 4437 lm 3000 K / 4647 lm
220–240 V / 46 W
100 lm / W
DALI dim-Push dim
6.5 kg
L89 × W89 × H93 cm (0.74 m³)
15 kg

s3
Ceiling suspended
2700 K / 5091 lm 3000 K / 5331 lm
220–240 V / 46 W
115 lm / W
DALI dim-Push dim
11.5 kg
L142 × W142 × H54 cm (1.09 m³)
24 kg

2700 K Colour temperature (CCT)

Traffic White (RAL 9016)	
Jet black (RAL 9005)	
Red orange (RAL 2001)	
Carmine red (RAL 3002)	
Purple red (RAL 3004)	
Raw brushed	

Art. No. / EAN code

151S2279016 / 7330492009018
151S2279005 / 7330492009001
151S2273002 / 7330492009025
151S2270002 / 7330492000800

Art. No. / EAN code

151S3279016 / 7330492009070
151S3279005 / 7330492009063
151S3273004 / 7330492009087
151S3270002 / 7330492000824

3000 K Colour temperature (CCT)

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Red orange (RAL 2001)	
Carmine red (RAL 3002)	
Purple red (RAL 3004)	
Raw brushed	

Art. No. / EAN code

151S2309016 / 7330492009049
151S2309005 / 7330492009032
151S2303002 / 7330492009056
151S2300002 / 7330492000817

Art. No. / EAN code

151S3309016 / 7330492009100
151S3309005 / 7330492009094
151S3303004 / 7330492009117
151S3300002 / 7330492000831