


w203 Illumina white

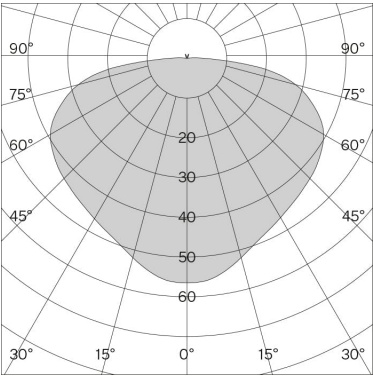

Technical information

Physical	
Material	Shade & base: aluminium/ copper Dimmer knob & internal structure: ABS
Optics	Reflector: ABS Diffuser: polycarbonate
IP rating	20
Protection class	II
LED	
Light source	COB LED (included)
Life time expectancy	L80 / 50,000 h
CRI Colour rendering index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	
LED Colour temperature (CCT) / Luminous flux	
Voltage / System power	
Efficacy	
Light control	
Net weight	
Packaging dimensions	
Gross weight	
Colour / Finish	
White (RAL 9003)	
Aluminium	
Copper (nano-coated)	

w203 Illumina white



White	
2700 K / 267 lm	
100-240 V / 8 W	
34 lm / W	
Integrated sliding dimmer potentiometer	
1.6 kg	
L45 × W45 × H16.5 cm (0.03 m³)	
3.0 kg	
Art. No. / EAN code	
203T100 / 7330492008721	

w203 Illumina aluminium



w203 Illumina copper



Article-specific information

Version
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

Aluminium
2700 K / 267 lm
100-240 V / 8 W
34 lm / W
Integrated sliding dimmer potentiometer
1.6 kg
L45 × W45 × H16.5 cm (0.03 m³)
3.0 kg

Copper
2700 K / 267 lm
100-240 V / 8 W
34 lm / W
Integrated sliding dimmer potentiometer
3.6 kg
L45 × W45 × H16.5 cm (0.03 m³)
5.0 kg

Colour / Finish
White (RAL 9003)
Aluminium
Copper (nano-coated)

Art. No. / EAN code
203T200 / 7330492008738

Art. No. / EAN code
203T300 / 7330492008745