


w221 Medium pendant s1 traffic white

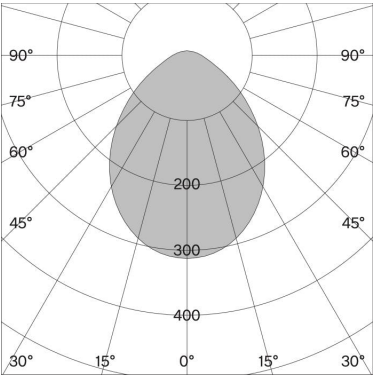

Technical information

Physical	
Material	Shade: aluminium Canopy: polycarbonate
Optics	Diffuser: acrylic
IP rating	20
Protection class	I


LED

Light source	LED (included)
Lifetime expectancy	L80 / 50.000 h
CRI Colour rendering index	≥ 90
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w221 Medium pendant

w221 Medium pendant s2 traffic white

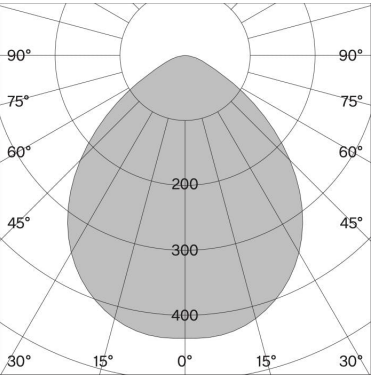

Article-specific information

Version	
Mounting	
LED Colour temperature (CCT) / Luminous flux	
Efficacy	
Voltage / System power	
Light control	
Net weight	
Packaging dimensions	
Gross weight	

Phase-cut dim

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw brushed	●


DALI dim-Push dim

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw brushed	●

Accessories

1-phase track adapter white	●
1-phase track adapter black	●
3-phase track adapter white	●
3-phase track adapter black	●
3-phase track DALI adapter white	●
3-phase track DALI adapter black	●

w221 Medium pendant s1



s1	
Ceiling suspended	
2700 K / 614 lm	
54 lm / W	
220–240 V / 11 W	
Phase-cut dim / DALI dim-Push dim	
1.6 kg	
L28.4 x W28.4 x H67.2 cm (0.05 m³)	
3.0 kg	

Art. No. / EAN code

221S102271 / 7330492000244	
221S105271 / 7330492000251	
221S120271 / 7330492001241	


Art. No. / EAN code

221S102272 / 7330492000305	
221S105272 / 7330492000312	
221S120272 / 7330492001258	


Art. No. / EAN code

ACC00102 / 7330492001920	
ACC00105 / 7330492001937	
ACC00202 / 7330492001944	
ACC00205 / 7330492001951	
ADAPT1-001 / 7330492001982	
ADAPT1-002 / 7330492001999	

w221 Medium pendant s2

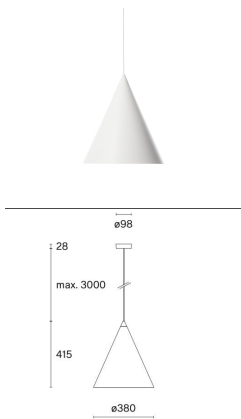

w221 Medium pendant s3

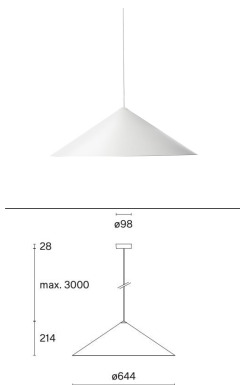

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Efficacy
Voltage / System power
Light control
Net weight
Packaging dimensions
Gross weight

s2
Ceiling suspended
2700 K / 922 lm
83 lm / W
220–240 V / 11 W
Phase-cut dim / DALI dim-Push dim
2.1 kg
L44.1 x W44.1 x H48.2 cm (0.09 m³)
4.3 kg

s3
Ceiling suspended
2700 K / 1008 lm
91 lm / W
220–240 V / 11 W
Phase-cut dim / DALI dim-Push dim
2.8 kg
L72.7 x W71.3 x H27.2 cm (0.14 m³)
7.4 kg

Phase-cut dim
Traffic white (RAL 9016)
Jet black (RAL 9005)
Raw brushed

Art. No. / EAN code
221S202271 / 7330492000268
221S205271 / 7330492000275
221S220271 / 7330492001265

Art. No. / EAN code
221S302271 / 7330492000282
221S305271 / 7330492000299
221S320271 / 7330492001289

DALI dim-Push dim
Traffic white (RAL 9016)
Jet black (RAL 9005)
Raw brushed

Art. No. / EAN code
221S202272 / 7330492000329
221S205272 / 7330492000336
221S220272 / 7330492001272

Art. No. / EAN code
221S302272 / 7330492000343
221S305272 / 7330492000350
221S320272 / 7330492001296

Accessories
1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black
3-phase track DALI adapter white
3-phase track DALI adapter black

Art. No. / EAN code
ACC00102 / 7330492001920
ACC00105 / 7330492001937
ACC00202 / 7330492001944
ACC00205 / 7330492001951
ADAPT1-001 / 7330492001982
ADAPT1-002 / 7330492001999

Art. No. / EAN code
ACC00102 / 7330492001920
ACC00105 / 7330492001937
ACC00202 / 7330492001944
ACC00205 / 7330492001951
ADAPT1-001 / 7330492001982
ADAPT1-002 / 7330492001999