




Technical information


Physical	
Material	Lamp body & wall bracket: aluminium Base & pin: steel
Optics	Glare shade: polyamide Lens: polycarbonate
IP rating	20
Protection class	II

LED

Light source	COB LED (included)
Lifetime expectancy	L80 / 50,000 h
CRI Colour rendering index	97
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w225 lon 3000 K wide



Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Beam angle / Optics
Light control
Net weight
Packaging dimensions
Gross weight

2700 K Colour temperature (CCT)

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw tumbled	


3000 K Colour temperature (CCT)

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw tumbled	

Accessories

Adapter suitable for USM Haller Table
Adapter suitable for USM Haller Shelf
Adapter suitable for Vitra Joyn 2
Adapter suitable for Vitra Tyde 2
Narrow / Lens
Wide / Reflector & diffuser
Packaging dimensions

w225 lon b4040



b4040
Base
3000 K / 439 lm
100–240 V / 6.3 W
60 lm / W
Wide / Lens
Dimmable
3.3 kg
L58.3 × W31.6 × H10.1 cm
4.9 kg

Art. No. / EAN code


Art. No. / EAN code
225B40400230W / 7330492000541
225B40400530W / 7330492000558
225B40402030W / 7330492001845

Art. No. / EAN code


225-N01 / 7330492000688

L64.8 x W31.6 x H10.1 cm (0.02 m³)

w225 lon p4040

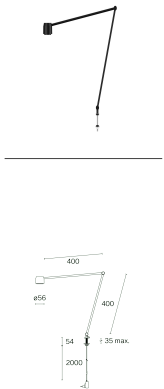

w225 lon b9040

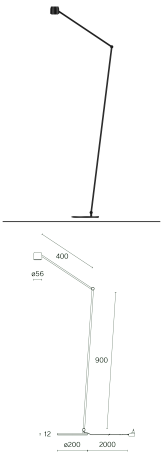

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Beam angle / Optics
Light control
Net weight
Packaging dimensions
Gross weight

p4040
Pin - integrated (hole ø14 mm)
3000 K / 439 lm
100–240 V / 6.3 W
60 lm / W
Wide / Lens
Dimmable
0.48 kg
L58.3 × W31.6 × H10.1 cm
2.1 kg

b9040
Floor base
2700 K / 380 lm 3000 K / 405 lm
100–240 V / 6.3 W
70 lm / W
Narrow / Lens
Dimmable
3.3 kg
L104.4 × W36.3 × H10.1 cm
6.8 kg

2700 K Colour temperature (CCT)

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw tumbled	●

Art. No. / EAN code

Art. No. / EAN code

225B90400227N / 7330492000602
225B90400527N / 7330492000619

3000 K Colour temperature (CCT)

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw tumbled	●

Art. No. / EAN code
225P40400230W / 7330492000565
225P40400530W / 7330492000572
225P40402030W / 7330492001852

Art. No. / EAN code

225B90400230N / 7330492000589
225B90400530N / 7330492000596


Accessories

Adapter suitable for USM Haller Table
Adapter suitable for USM Haller Shelf
Adapter suitable for Vitra Joyn 2
Adapter suitable for Vitra Tyde 2
Narrow / Lens
Wide / Reflector & diffuser
Packaging dimensions

Art. No. / EAN code
225ACC001 / 7330492002002
225ACC006 / 7330492002019
225ACC002 / 7330492002026
225ACC003 / 7330492002033
225-N01 / 7330492000688

Art. No. / EAN code
225-W02 / 7330492001913

w225 lon br4040



w225 lon br0



Article-specific information

Version	br4040
Mounting	Wall bracket
LED Colour temperature (CCT) / Luminous flux	3000 K / 439 lm
Voltage / System power	100–240 V / 6.3 W
Efficacy	60 lm / W
Beam angle / Optics	Wide / Lens
Light control	Dimmable
Net weight	0.5 kg
Packaging dimensions	L58.3 × W31.6 × H10.1 cm
Gross weight	2.2 kg

br4040
Wall bracket
3000 K / 439 lm
100–240 V / 6.3 W
60 lm / W
Wide / Lens
Dimmable
0.5 kg
L58.3 × W31.6 × H10.1 cm
2.2 kg

br0
Wall bracket
2700 K / 380 lm 3000 K / 405 lm
100–240 V / 6.3 W
70 lm / W
Narrow / Lens
Dimmable
0.4 kg
L15.4 × W14.3 × H13.1 cm
0.6 kg

2700 K Colour temperature (CCT)

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw tumbled	●

Art. No. / EAN code

Art. No. / EAN code
225BR00227N / 7330492000664
225BR00527N / 7330492000671
225BR02027N / 7330492001906

3000 K Colour temperature (CCT)

Traffic white (RAL 9016)	●
Jet black (RAL 9005)	●
Raw tumbled	●

Art. No. / EAN code
225BR40400230W / 7330492000626
225BR40400530W / 7330492000633
225BR40402030W / 7330492001883

Art. No. / EAN code
225BR00230N / 7330492000640
225BR00530N / 7330492000657
225BR02030N / 7330492001890

Accessories

Adapter suitable for USM Haller Table
Adapter suitable for USM Haller Shelf
Adapter suitable for Vitra Joyn 2
Adapter suitable for Vitra Tyde 2
Narrow / Lens
Wide / Reflector & diffuser

Art. No. / EAN code
225-N01 / 7330492000688

Art. No. / EAN code
225-W02 / 7330492001913