


w242 Pastille alu

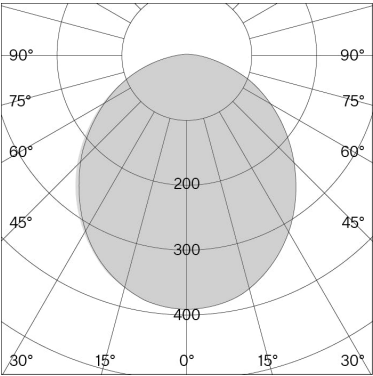


Technical information

Physical	
Material	Lamp body: aluminium Table base/clamp: aluminium & steel Pin/bracket: aluminium Floor stand: steel
Optics	Reflector: ABS Diffuser: polycarbonate
IP rating	20
Protection class	II
LED	
Light source	COB LED (included)
Life time expectancy	L80 / 50,000 h
CRI Colour Rendering Index	95
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w242 Pastille alu


w242 Pastille alu

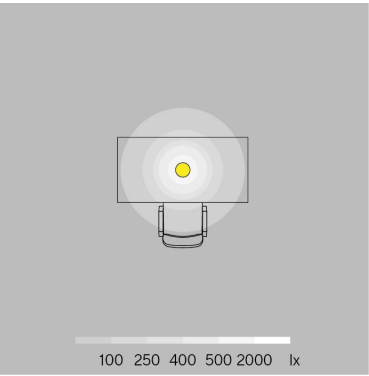

Article-specific information


Version	
Mounting	
LED Colour temperature (CCT) / Luminous flux	
Voltage / System power	
Efficacy	
Light control	
Net weight	
Packaging dimensions	
Gross weight	
Colour	
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Olive green (RAL 6003)	
Oxide red (RAL 3009)	
Raw tumbled	
Telegray 4 (RAL 7047)	
Accessories	
Adapter suitable for Vitra Joyn 2 / Tyde 2	
Adapter suitable for USM Haller table	
Adapter suitable for USM Haller shelf	

w242 Pastille alu b2

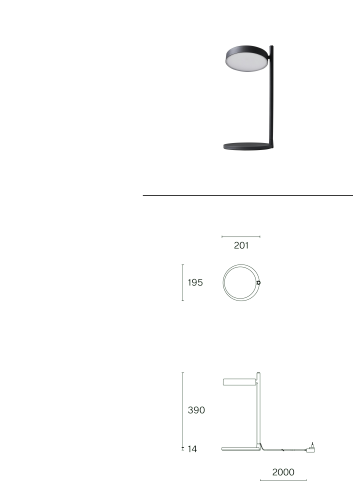


b2	
Base	2700 K / 547 lm
	100–240 V / 7.4 W
	74 lm / W
	Dimmable
	1.7 kg
	L51.0 × W23.2 × H7.8 cm (0.009 m³)
	2.3 kg
Art. No. / EAN code	
242B20227 / 7330492011684	
242B20527 / 7330492011745	
242B20127 / 7330492011660	
242B20327 / 7330492011707	
242B22027 / 7330492011769	
242B20427 / 7330492011721	
Art. No. / EAN code	

w242 Pastille alu c1

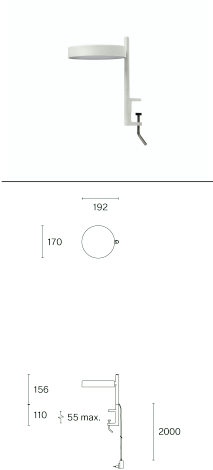

w242 Pastille alu c2

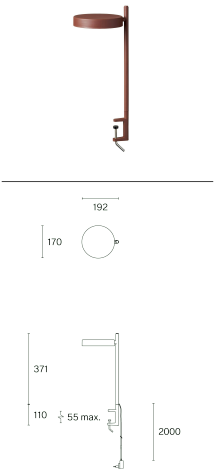

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

c1
Clamp
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
0.6 kg
L36.0 × W22.3 × H5.2 cm (0.004 m³)
0.9 kg


c2
Clamp
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
0.7 kg
L51.0 × W23.2 × H7.8 cm (0.009 m³)
1.3 kg

Colour
Traffic white (RAL 9016)
Jet black (RAL 9005)
Olive green (RAL 6003)
Oxide red (RAL 3009)
Raw tumbled
Telegray 4 (RAL 7047)
Accessories
Adapter suitable for Vitra Joyn 2 / Tyde 2
Adapter suitable for USM Haller table
Adapter suitable for USM Haller shelf


Art. No. / EAN code
242CL10227 / 7330492012162
242CL10527 / 7330492012223
242CL10127 / 7330492012148
242CL10327 / 7330492012186
242CL12027 / 7330492012247
242CL10427 / 7330492012209
Art. No. / EAN code

Art. No. / EAN code
242CL20227 / 7330492012285
242CL20527 / 7330492012346
242CL20127 / 7330492012261
242CL20327 / 7330492012308
242CL22027 / 7330492012360
242CL20427 / 7330492012322
Art. No. / EAN code

w242 Pastille alu p2

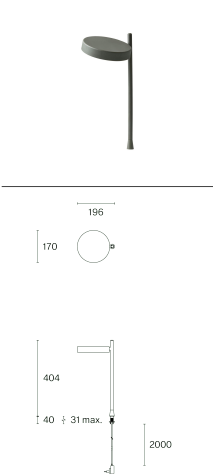

w242 Pastille alu f2

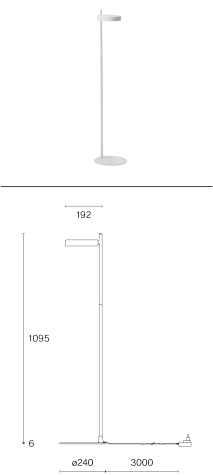

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

p2
Pin – Integrated (hole ø 20 mm)
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
0.7 kg
L51.0 × W23.2 × H7.8 cm (0.009 m³)
1.3 kg


f2
Floor base
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
3.6 kg
L119.6 × W28.8 × H6.8 cm (0.02 m³)
5.5 kg

Colour
Traffic white (RAL 9016)
Jet black (RAL 9005)
Olive green (RAL 6003)
Oxide red (RAL 3009)
Raw tumbled
Telegray 4 (RAL 7047)
Accessories
Adapter suitable for Vitra Joyn 2 / Tyde 2
Adapter suitable for USM Haller table
Adapter suitable for USM Haller shelf


Art. No. / EAN code
242P20227 / 7330492012568
242P20527 / 7330492012629
242P20127 / 7330492012544
242P20327 / 7330492012582
242P22027 / 7330492012643
242P20427 / 7330492012605
Art. No. / EAN code
242-ADAPT001 / 7330492011639
242-ADAPT002 / 7330492011646
242-ADAPT003 / 7330492011653

Art. No. / EAN code
242F20227 / 7330492012469
242F20527 / 7330492012520
242F20127 / 7330492012445
242F20327 / 7330492012483
242F20427 / 7330492012506
Art. No. / EAN code

w242 Pastille alu br1

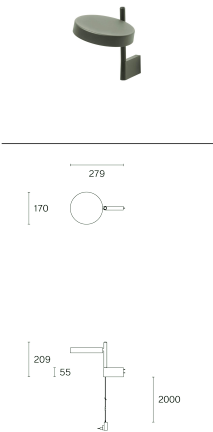

w242 Pastille alu br2

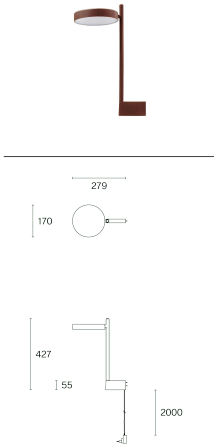

Article-specific information

Version
Mounting
LED Colour temperature (CCT) / Luminous flux
Voltage / System power
Efficacy
Light control
Net weight
Packaging dimensions
Gross weight

br1
Wall bracket
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
0.6 kg
L36.0 × W22.3 × H5.2 cm (0.004 m³)
0.9 kg

br2
Wall bracket
2700 K / 547 lm
100–240 V / 7.4 W
74 lm / W
Dimmable
0.6 kg
L51.0 × W23.2 × H7.8 cm (0.009 m³)
1.3 kg

Colour
Traffic white (RAL 9016)
Jet black (RAL 9005)
Olive green (RAL 6003)
Oxide red (RAL 3009)
Raw tumbled
Telegray 4 (RAL 7047)
Accessories
Adapter suitable for Vitra Joyn 2 / Tyde 2
Adapter suitable for USM Haller table
Adapter suitable for USM Haller shelf

Art. No. / EAN code
242BR10227 / 7330492011868
242BR10527 / 7330492011929
242BR10127 / 7330492011844
242BR10327 / 7330492011882
242BR12027 / 7330492011943
242BR10427 / 7330492011905
Art. No. / EAN code

Art. No. / EAN code
242BR20227 / 7330492011981
242BR20527 / 7330492012049
242BR20127 / 7330492011967
242BR20327 / 7330492012001
242BR22027 / 7330492012063
242BR20427 / 7330492012025
Art. No. / EAN code