


Cover G-22S

Ref. B17013

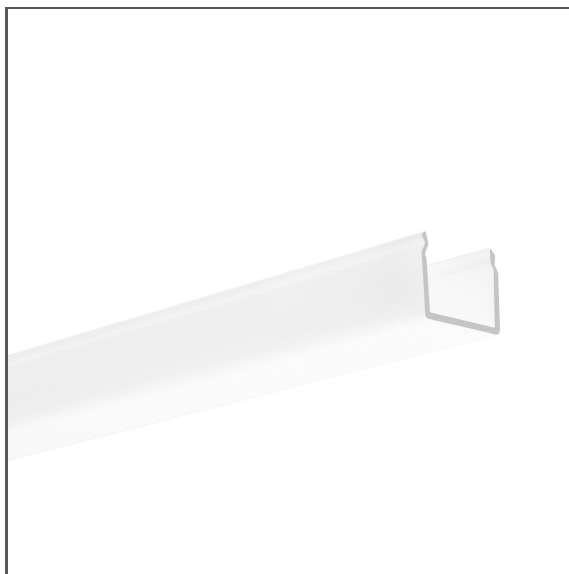

- Resistance to weather conditions

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- Snapped in a dedicated profile

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PMMA
Shape	square
Maximum length on request	6000 mm
Width	24 mm
UV resistance	yes

Finish	Light transmission	Length	High mechanical resistance	Ref
satin	86 %	1000 mm	no	B17013S_1
		2005 mm		B17013S_2
		3010 mm		B17013S_3
semi-transparent	89 %	1000 mm	yes	B17013T_1
		2005 mm		B17013T_2
		3010 mm		B17013T_3
black	15 %	1000 mm	no	B17013B_1
		2005 mm		B17013B_2
		3010 mm		B17013B_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

PROFILE PODOBNE




KOZMA-22-BOK
A00018



KOZUS
A07823



KOZUS-BOK
A00017



LARKO
A05552



LOKOM
A05553



OPAC-30
A06164



GIZA
A05556



GIZA-LL
A00758



LIPOD
A05554



GLAZA-LL
A02627




GIZA-LL-T
A02479



GIZA-LL-UST
A02724



KOZEL
A06454



KOZMA-22
A00019



KOZUS-CR
A00600



LOC-30
A18015