


# Cover HSP-90

Ref. B17166F, B17166M

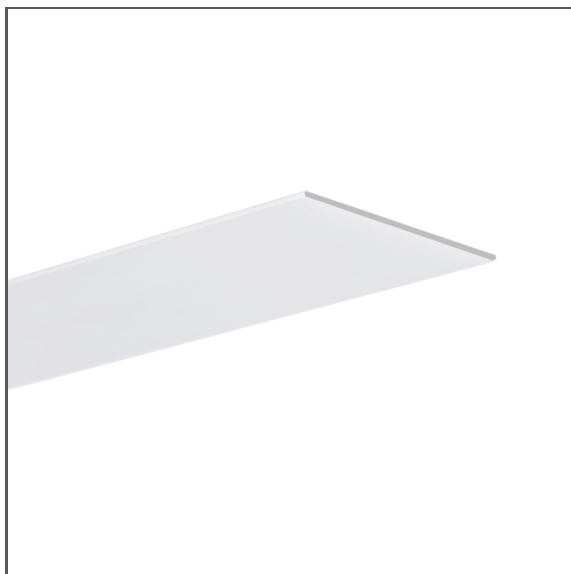

- Perfectly diffuses light

### APPLICATION

- LED protection and light diffusion in lighting fixtures


### MOUNTING

- to the profile, by pressing

### ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

### TECHNICAL DRAWING



### TECHNICAL SPECIFICATIONS


Shape	flat
Maximum length on request	3000 mm
Width	90 mm
UV resistance	yes

Finish	Material	Light transmission	Length	Possibility of obtaining a line of light	Glare rating reduction UGR<19	Ref
frosted	PC	68 %	1000 mm	yes	no	B17166F_1
			2005 mm			B17166F_2
			3010 mm			B17166F_3
microprism	PMMA	82 %	1500 mm	no	yes	B17166M_1.5

SAMPLE PROJECTS



RELATED PROFILES > FOR MAIN LIGHTING




**MOD-100**  
A18049



**OMODO-100**  
A18058

RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



**MOD-100**  
18049



**MOD-KOL-100**  
A18062+A18058



**MOD-KOZE-100**  
A18057+A18058



**MOD-TEK-100**  
A18061+A18058