

Profile MICRO-30DEG-K

Ref. A00020

NEW



IP20

IP67



- Lighting angle: 30 Degrees
- Compact dimensions
- Dedicated for installation in furniture boards and built-in structures

APPLICATION

- furniture and decorative lighting


MOUNTING

- recessed, with mounting adhesive or double-sided adhesive tape

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

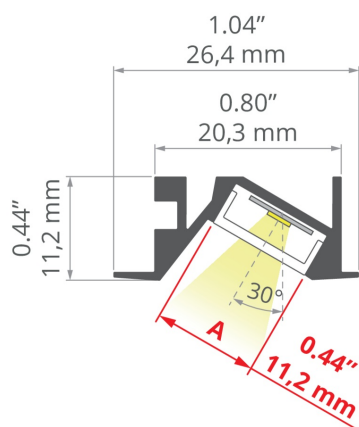

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	20.3 mm
Height	11.2 mm
LED gluing width A	11.2 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Lighting at an angle	30
Possibility of obtaining a line of light	yes
Building type	Commercial, Residential, HoReCa object, Entertainment/ Arts

Color	Length	Ref
silver anodized	1000 mm	A00020A_1
	2005 mm	A00020A_2
	3010 mm	A00020A_3
silver non anodized	1000 mm	A00020N_1
	2005 mm	A00020N_2
	3010 mm	A00020N_3
white lacquered	1000 mm	A00020L10_1
	2005 mm	A00020L10_2
	3010 mm	A00020L10_3
black anodized	1000 mm	A00020A07_1
	2005 mm	A00020A07_2
	3010 mm	A00020A07_3


Profile MICRO-30DEG-K

Ref. A00020

Facility zone	kitchen, bathroom, under-cabinet / furniture, exhibition / tradeshow / display, cove / perimeter, fitness / spa, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Furniture lighting	yes
Decorative lighting	yes
Under-cabinet lighting	yes
Wire out back of extrusion	yes

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

SAMPLE PROJECTS

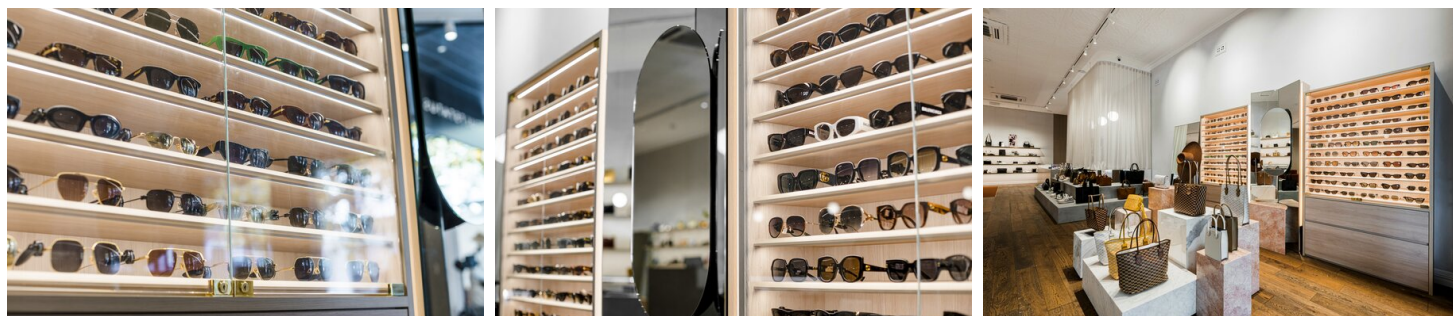

RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover KA-11		PC	67 %	frosted	B17064F
			89 %	clear	B17064C
Cover KA-T-11		PVC	54 %	frosted	B17179F
			86 %	clear	B17179C
Cover HS-11		PC	59 %	frosted	B17208F
			88 %	clear	B17208C
Cover LIGER-11		PC	21 %	black	B17037B
			59 %	satin	B17037S

Profile MICRO-30DEG-K

Ref. A00020

RELATED ACCESSORIES > END CAPS

NAME			MATERIAL	COLOR	REF.
End cap MICRO-30DEG-K-L	NEW		ABS	black	C24546C07
				gray	C24546C02
				white	C24546C10
End cap MICRO-30DEG-K-P	NEW		ABS	black	C24547C07
				gray	C24547C02
				white	C24547C10

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape KWP-GHD-0480-24 NEW	65	4.8 W/m	KWP-GHD27-0480-24 KWP-GHD30-0480-24 KWP-GHD35-0480-24 KWP-GHD40-0480-24 KWP-GHD50-0480-24
LED tape KWP-GHD-0960-24 NEW	65	9.6 W/m	KWP-GHD27-0960-24 KWP-GHD30-0960-24 KWP-GHD35-0960-24 KWP-GHD40-0960-24 KWP-GHD50-0960-24
LED tape KWP-GHD-1440-24 NEW	65	14.4 W/m	KWP-GHD27-1440-24 KWP-GHD30-1440-24 KWP-GHD35-1440-24 KWP-GHD40-1440-24 KWP-GHD50-1440-24
LED tape K-0480-24	20	4.8 W/m	K-27-0480-24 K-30-0480-24 K-35-0480-24 K-40-0480-24 K-50-0480-24
LED tape K-0960-24	20	9.6 W/m	K-27-0960-24 K-30-0960-24 K-30-0960-24-R30 K-35-0960-24 K-40-0960-24 K-40-0960-24-R30 K-50-0960-24 K-65-0960-24
LED tape K-1440-24	20	14.4 W/m	K-27-1440-24 K-30-1440-24 K-30-1440-24-R30 K-35-1440-24 K-40-1440-24 K-40-1440-24-R30 K-50-1440-24

Profile MICRO-30DEG-K

Ref. A00020

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-2400-24	20	24 W/m	K-27-2400-24 K-30-2400-24 K-35-2400-24 K-40-2400-24 K-50-2400-24
LED tape K-HD-0480-24	20	4.8 W/m	K-HD27-0480-24 K-HD30-0480-24 K-HD35-0480-24 K-HD40-0480-24 K-HD50-0480-24
LED tape K-HD-0960-24	20	9.6 W/m	K-HD27-0960-24 K-HD30-0960-24 K-HD35-0960-24 K-HD40-0960-24 K-HD50-0960-24
LED tape K-HD-1440-24	20	14.4 W/m	K-HD27-1440-24 K-HD30-1440-24 K-HD35-1440-24 K-HD40-1440-24 K-HD50-1440-24
LED tape K-2300-24	20	23 W/m	K-30-2300-24 K-40-2300-24

RELATED ACCESSORIES > RELATED LED > CRI 95+

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape KWP-CR-0480-24	65	4.8 W/m	KWP-CR27-0480-24 KWP-CR30-0480-24 KWP-CR35-0480-24 KWP-CR40-0480-24 KWP-CR50-0480-24
LED tape KWP-CR-0960-24	65	9.6 W/m	KWP-CR27-0960-24 KWP-CR30-0960-24 KWP-CR35-0960-24 KWP-CR40-0960-24 KWP-CR50-0960-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-VHE-0480-24	20	4.8 W/m	K-VHE27-0480-24 K-VHE30-0480-24 K-VHE35-0480-24 K-VHE40-0480-24 K-VHE50-0480-24
LED tape K-VHE-0960-24	20	9.6 W/m	K-VHE27-0960-24 K-VHE30-0960-24 K-VHE35-0960-24 K-VHE40-0960-24 K-VHE50-0960-24
LED tape K-VHE-1440-24	20	14.4 W/m	K-VHE27-1440-24 K-VHE30-1440-24 K-VHE35-1440-24 K-VHE40-1440-24 K-VHE50-1440-24

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Profile MICRO-30DEG-K

Ref. A00020

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-RGBW-1530-24	20	15.3 W/m	K-RGBW-1530-24
LED tape KWP-GRGBW-1530-24	65	15.3 W/m	KWP-GRGBW-1530-24
LED tape K-RGB-0700-24V	20	7 W/m	K-RGB-0700-24V
LED tape K-RGB-1200-24	20	12 W/m	K-RGB-1200-24
LED tape KWP-RGB-1200-24	65	12 W/m	KWP-RGB-1200-24

RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-18D30-0960-24	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	20	14.4 W/m	K-27T50-1440-24
LED tape K-18D30-0960-24	20	9.6 W/m	K-18D30-0960-24
LED tape K-27T50-1440-24	20	14.4 W/m	K-27T50-1440-24

RELATED ACCESSORIES > RELATED LED > DIGITAL

Name	Stopień ochrony IP	Moc [W/m]	Ref.
Digital LED strip K-DL-1229-24 NEW	20	12.29 W/m	K-DL30-1229-24 K-DL40-1229-24
Digital LED strip KWP-GDL-1229-24 NEW	65	12.29 W/m	KWP-GDL30-1229-24 KWP-GDL40-1229-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS

Name	Materiał	Kolor	Ref.
Connector ZM-PION	stainless steel	 silver	42314
			42316
			42320
			42718
			42719
			C28084N00
			C28085N00
			C28086N00
Connector ZM	stainless steel	 silver	C28087N00
			C28088N00
			42716
			42717
			42720
			42728
			C28070N00
			C28071N00
			C28072N00
			C28073N00
			C28074N00
			C28075N00
			C28243N00

RELATED ACCESSORIES > ELECTRONICS > SWITCHES

Profile MICRO-30DEG-K

Ref. A00020

Name	Stopień ochrony IP	Ref.
Proximity switch UNI-11 NEW	20	E61603
Proximity switch UNI-11P NEW	20	E61604
Magnetic switch UNI-M07P NEW	20	E62154
Magnetic switch UNI-M11 NEW	20	E62157
Magnetic switch UNI-M11P NEW	20	E62158
Magnetic switch UNI-M07 NEW	20	E62153
Proximity switch UNI	20	E61579
Proximity switch UNI-P	20	E61580
Switch MICRO 96W IP20	20	1491
Switch MICRO 96W IP20	20	1491LOGO