


Profile OLIS

Ref. A18003

NEW

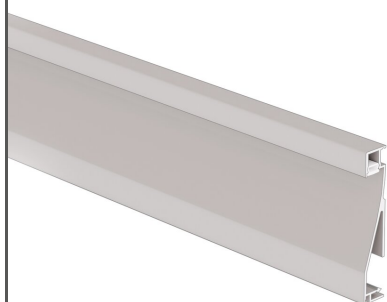

IP20



IP65



CE



UKCA



RoHS COMPLIANT

- Illuminated skirting board
- Masking the expansion joints between the wall and the floor
- Masking gaps on uneven surfaces
- Space for cable management
- Easy assembly

APPLICATION

- warning and decorative lighting
- function of a standard skirting board

MOUNTING


- to the surface, using mounting adhesives
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- masking the gaps between the profile and the mounting surface is possible thanks to the use of a dedicated seal
- the use of a dedicated connection strip at the back of the profile prevents slits between individual sections of the profile and facilitates the routing of cables
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2



TECHNICAL SPECIFICATIONS


Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Width	14 mm
Height	80 mm
LED gluing width A	7 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Possibility of obtaining a line of light	yes
Building type	Residential, HoReCa object, Commercial, Obiekt kulturalno/rozrywkowy
Facility zone	communication routes and corridors, wall lighting
The cover is cut to the length of the profile	yes
Decorative lighting	yes
Functional lighting	yes
Wire out back of extrusion	yes

Color	Length	Ref
silver anodized	1000 mm	A18003A_1
	2005 mm	A18003A_2
	3010 mm	A18003A_3
white lacquered	1000 mm	A18003L10_1
	2005 mm	A18003L10_2
	3010 mm	A18003L10_3
black anodized	1000 mm	A18003A07_1
	3010 mm	A18003A07_3
	2005 mm	A18003A07_2

Profile OLIS

Ref. A18003

SAMPLE PROJECTS

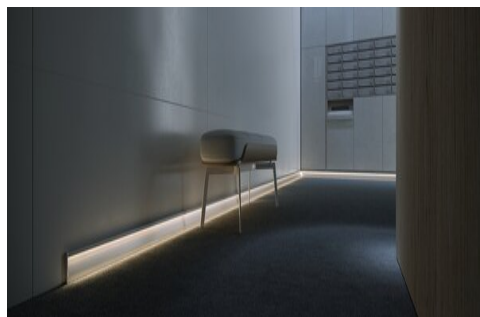

RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7		silicon	53 %	frosted	B17069F
Cover PIKO-7		PMMA	17 %	black	B17001B

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap OLIS-90Z		ABS	 black	C24478C07
			 gray	C24478C02
			 white	C24478C10
End cap OLIS-90W		ABS	 black	C24477C07
			 gray	C24477C02
			 white	C24477C10
End cap OLIS-L		ABS	 black	C24480C07
			 gray	C24480C02
			 white	C24480C10
End cap OLIS-P		ABS	 black	C24481C07
			 gray	C24481C02
			 white	C24481C10

RELATED ACCESSORIES > RELATED LED > BENDABLE



K-BT-0450-24
K-BT-0450-24

RELATED ACCESSORIES > RELATED LED > ULTRATHIN



K-1091-24
K-1091-24



K-SHD-0960-24
K-SHD-0960-24



K-0450-24
K-0450-24



KWP-5K-0450-24
KWP-5K-0450-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO



KWP-5K-1091-24
KWP-5K-1091-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > ADDITIONAL ITEMS



CONNECTING STRIP
OS
C24009C10

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



HERMETIC COUPLER
THB.391.A4A, 4 pin
C42268C10



HERMETIC COUPLER
THB.381, 2pin
C28125C07



HERMETIC COUPLER
THB.391.A5A, 5 pin
C28156C07



JOINT CONNECTOR
THB.200.E5E, 5 pin
C28157C07

RELATED ACCESSORIES > ELECTRONICS > OTHER



JST-BEC
E60022