

Profile PIKO-KZ

Ref. A00034



IP20

IP65



- Aesthetic decoration of external corners with a delicate line of light
- Installation on slabs and tiles with a maximum thickness of 13mm
- The profile flange masks the edges of slabs and tiles
- Wide range of accessories
- Possibility of installing sealed 5K series LED strips


APPLICATION

- decorative lighting for external corners

MOUNTING

- in drywall, with mounting adhesive

TECHNICAL DRAWING

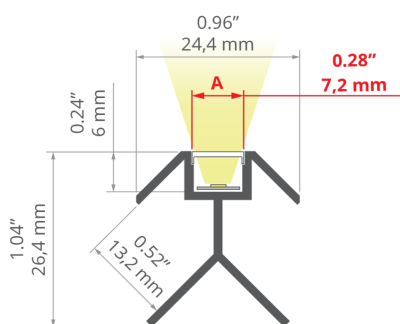

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear
Profile cross-section	angled
Width	24.4 mm
Height	26.3 mm
LED gluing width A	7.2 mm
Possibility of obtaining a line of light	yes
Building type	Residential, HoReCa object, Entertainment/ Arts
Facility zone	communication routes and corridors, decorative, bathroom, cove / perimeter, edge lighting
The cover is cut to the length of the profile	yes
Decorative lighting	yes
Mounting to drywall	yes

Color	Length	Ref
■ black anodized	1000 mm	A00034A07_1
	2005 mm	A00034A07_2
	3010 mm	A00034A07_3
■ silver anodized	1000 mm	A00034A_1
	2005 mm	A00034A_2
	3010 mm	A00034A_3
□ white lacquered	1000 mm	A00034L10_1
	2005 mm	A00034L10_2
	3010 mm	A00034L10_3

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)

SAMPLE PROJECTS



RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover PIKO-7		PMMA	17 %	black	B17001B
			43 %	satin	B17001S
Cover PIKO-7R		PMMA	24 %	black	B17164B
			52 %	satin	B17164S
			93 %	semi-transparent	B17164T
Cover PIKO-7T		PMMA	30 %	black	B17213B
			71 %	satin	B17213S

Profile PIKO-KZ

Ref. A00034

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap PIKO-KZ-T		ASA	black	C24779C07
			silver	C24779C02
			white	C24779C10
End cap PIKO-KZ		ASA	black	C24777C07
			silver	C24777C02
			white	C24777C10
End cap PIKO-KZ-R		ASA	black	C24778C07
			silver	C24778C02
			white	C24778C10

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-0450-24 NEW	20	4.5 W/m	K-27-0450-24 K-30-0450-24 K-35-0450-24 K-40-0450-24 K-50-0450-24
LED tape KWP-5K-0450-24 NEW	65	4.5 W/m	KWP-5K27-0450-24 KWP-5K30-0450-24 KWP-5K35-0450-24 KWP-5K40-0450-24 KWP-5K50-0450-24
LED tape K-SHD-0960-24 NEW	20	9.6 W/m	K-SHD22-0960-24 K-SHD25-0960-24 K-SHD27-0960-24 K-SHD30-0960-24 K-SHD35-0960-24 K-SHD40-0960-24 K-SHD50-0960-24
LED tape K-1091-24	20	9.1 W/m	K-22-1091-24 K-25-1091-24 K-27-1091-24 K-30-1091-24 K-35-1091-24 K-40-1091-24 K-50-1091-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	Stopień ochrony IP	Moc [W/m]	Ref.

Profile PIKO-KZ

Ref. A00034

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape KWP-5K-1091-24	65	9.1 W/m	KWP-5K22-1091-24 KWP-5K25-1091-24 KWP-5K27-1091-24 KWP-5K30-1091-24 KWP-5K35-1091-24 KWP-5K40-1091-24 KWP-5K50-1091-24

RELATED ACCESSORIES > RELATED LED > BENDABLE

Name	Stopień ochrony IP	Moc [W/m]	Ref.
LED tape K-BT-0450-24 NEW	20	4.5 W/m	K-BT27-0450-24 K-BT30-0450-24 K-BT35-0450-24 K-BT40-0450-24 K-BT50-0450-24
LED tape K-BT-0910-24	20	9.1 W/m	K-BT27-0910-24 K-BT30-0910-24 K-BT35-0910-24 K-BT40-0910-24 K-BT50-0910-24