

Profile ROGER

Ref. A06885

NEW



IP20



- For installation on wall corners
- Space provided for an electrical connector
- Colorful covers, including fluorescent
- Possibility of continuing the light line in the corner
- Light line with dedicated cover

APPLICATION

- warning lighting and corner protection


MOUNTING

- to the corner using glue

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance $+ 5$ mm); for selected covers: 6050 mm, 10050 mm (tolerance $+ 5$ mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING




TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 65
Possible fixture shapes	linear
Width	31.1 mm
Height	31.1 mm
LED gluing width A	4 mm
Number of LED strips A (8 mm wide)	0
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Outdoor
Facility zone	communication routes and corridors, parking and garage, driveways, entrances and gates
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Warning lighting	yes
Wire out back of extrusion	yes

Color	Length	Ref
■ black anodized	1000 mm	A06885A07_1
	2000 mm	A06885A07_2
	3000 mm	A06885A07_3
■ silver anodized	1000 mm	A06885A_1
	2000 mm	A06885A_2
	3000 mm	A06885A_3


SAMPLE PROJECTS

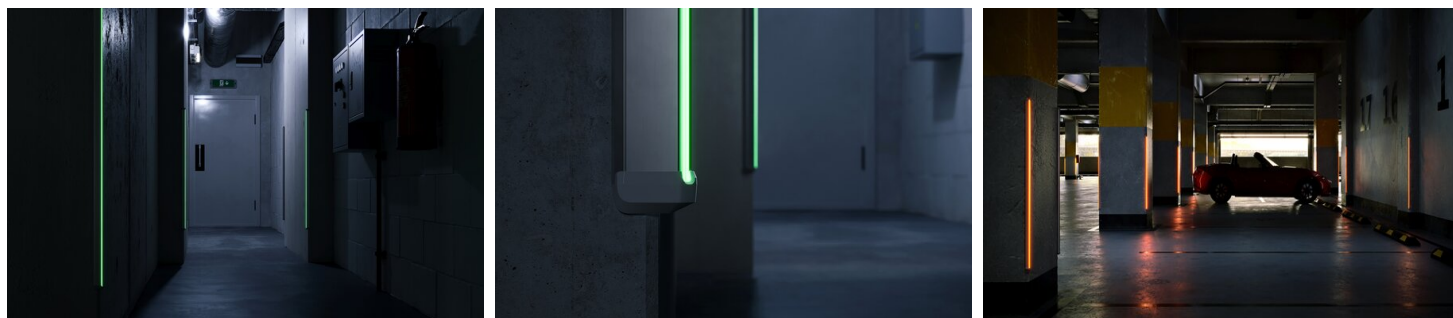

RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-5	 NEW	silicon	grey	B17002Y
			orange	B17002R
			phosphorescent	B17002N

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
 NEW	ABS	black	C20015C07
		gray	C20015C02

RELATED ACCESSORIES > RELATED LED > SPECIAL



KWP-3SL-0480-24
KWP-3SL-0480-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



HERMETIC COUPLER
THB.391.A4A, 4 pin
C42268C10



HERMETIC COUPLER
THB.381, 2pin
C28125C07



HERMETIC COUPLER
THB.391.A5A, 5 pin
C28156C07



JOINT CONNECTOR
THB.200.E5E, 5 pin
C28157C07