



## CHICCO

308-0010790302704

CHICCO ROUND R RECESSED SPOTLIGHT made of aluminium, silver, similar to RAL 9006, beam 30°, light output direct, without converter, max. 350mA, dimmability: see converter, IP65/IP20

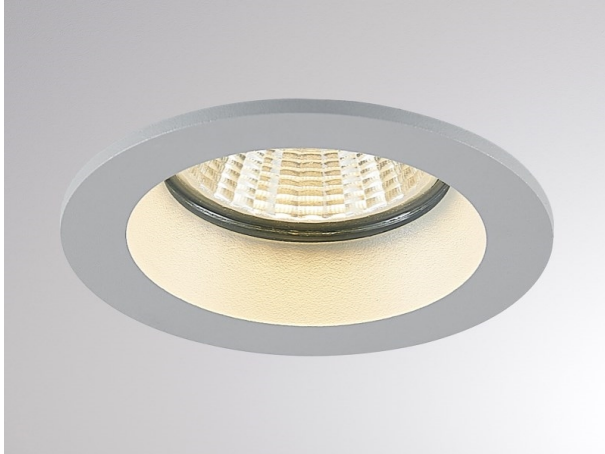

## DRAWING




## TECHNICAL DETAILS

|                    |                   |
|--------------------|-------------------|
| Bulb type          | LED 6W            |
| Luminous flux [lm] | 530               |
| Current sec. [mA]  | 350               |
| Colour temp. [K]   | 2700K             |
| CRI                | >90               |
| Converter          | without converter |
| Dimming            | see converter     |
| Light output       | direct            |
| Beam angle [°]     | 30°               |
| Voltage [V]        | 20 VDC            |
| Material           | aluminium         |

|                     |                    |
|---------------------|--------------------|
| Height [mm]         | 50                 |
| Diameter [mm]       | 90                 |
| Ceiling cutout [mm] | 78                 |
| Recess depth [mm]   | 80                 |
| IP protection class | IP65/IP20          |
| Voltage class       | protection cl. III |
| Net weight [kg]     | 0,25               |

|                       |                |
|-----------------------|----------------|
| Colour lamp           | silver         |
| RAL                   | 9006           |
| EAN-Number            | 9010506059243  |
| Lifetime [h]          | L80 B10 20 000 |
| Energy efficiency cl. | E              |

## LIGHT DISTRIBUTION CURVE

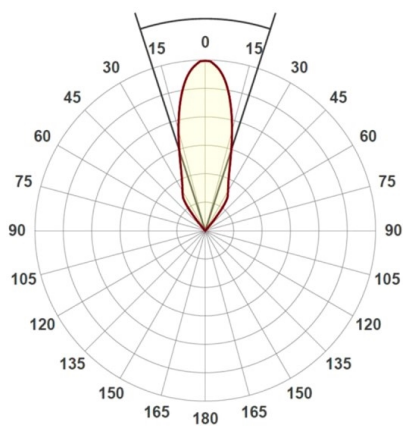

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.