

04 Recessed Spots Adjustable LED>The 1W/3W Mini Series Aluminium

11103B/AL/W



1W/3W COB LED adjustable recessed spot IP20.

Requires 350mA/700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

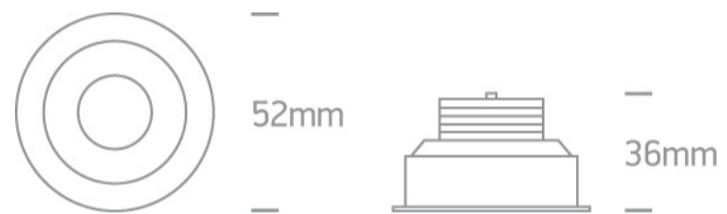

Gallery




Must be ordered separately



89004



89004A



89004AT





89004T

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The 1W/3W Mini Series Aluminium
Order Code	11103B/AL/W
Colour	Aluminium
Material	Aluminium
Shape	Circular
Height	36mm
Diameter	52mm
Cutout Hole Diameter	45mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/700mA
Safety Class	
Power(Watts)	1W/3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	


Illumination Data

Colour Temperature	3000K
Lumen Output	270lm@700mA
Light Efficiency	70lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length	9cm
Box Width	6cm
Box Height	5,5cm
Box Weight	0,080kg
Pcs/Carton	100
Barcode	5291889042471
HS Code	9405409900

Energy Label

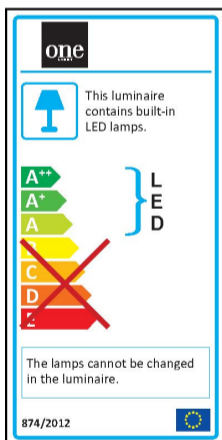

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

